


Vieler Edelstahl-Türgriff 311
Vieler stainless steel pull handle 311

Hochwertiges Material mit matt gebürsteter pflegeleichter Oberfläche. Wandstärke 2 mm.

Maintenance free brushed satin stainless steel.

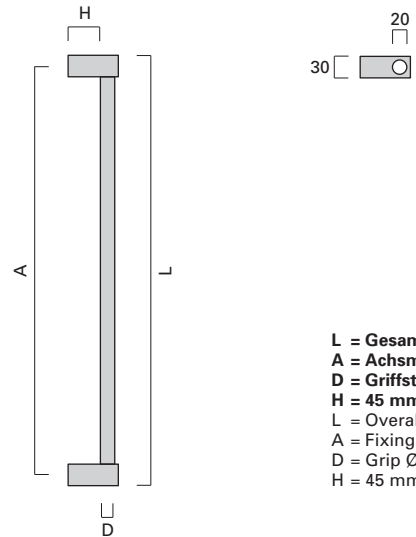

L = Gesamtlänge
A = Achsmaß
D = Griffstange Ø
H = 45 mm
L = Overall length
A = Fixing centre
D = Grip Ø
H = 45 mm

	Griffstange Ø 20 mm Anbindung Ø 30 mm Befestigung Einzel Grip Ø 20 mm Fixing brackets Ø 30 mm Single pull handle	Griffstange Ø 20 mm Anbindung Ø 30 mm Befestigung Paar Grip Ø 20 mm Fixing brackets Ø 30 mm Pair of pull handles			
L = 300 mm A = 270 mm	ER.EGx.311.0270	ER.PGx.311.0270			
L = 380 mm A = 350 mm	ER.EGx.311.0350	ER.PGx.311.0350			
L = 600 mm A = 570 mm	ER.EGx.311.0570	ER.PGx.311.0570			
L = 900 mm A = 870 mm	ER.EGx.311.0870	ER.PGx.311.0870			
L = 1200 mm A = 1170 mm	ER.EGx.311.1170	ER.PGx.311.1170			

Befestigungsarten x (z.B. ER.EG02.311.0150)
Fixing types x (e.g. ER.EG02.311.0150)

01 Holz- und Profiltür 40-80 mm, Bohr-Ø 9 mm Bolt through wooden and metal door 40-80 mm, Drilling hole Ø 9 mm	02 Holz- und Profiltür 40-80 mm mit Stockschraube Secret fix for wooden and metal door 40-80 mm with hanger bolt	03 Aluminiumprofil- rohrtür mit Ein- schneideschraube Aluminium box section door with threaded bush	04 Holz- und Profiltür 40-80 mm, Bohr-Ø 9 mm Bolt through wooden and metal door 40-80 mm, Drilling hole Ø 9 mm	05 Glastür 8-14 mm, Bohr-Ø 13 mm Bolt through glass door 8-14 mm, Drilling hole Ø 13 mm	06 Glastür 8-14 mm Bohr-Ø 13 mm Back-to-back glass door 8-14 mm, Drilling hole Ø 13 mm	07 Glastür UV-Verklebung Glass door UV bonding